FET Solid State Switches

U9422A/B/C 300 kHz to 26.5/50/54 GHz, SPDT U9424A/B/C 300 kHz to 26.5/50/54 GHz, SP4T U9428A/B/C 300 kHz to 26.5/50/54 GHz, SP8T



Key Features

- Broad operating frequency range from 300 kHz to 26.5/50/54 GHz
- · Minimizes crosstalk with exceptionally high isolation across broad frequency
- · Prevent damage to sensitive components with low video leakage
- Maintain fast throughput switch switching speed in microseconds
- USB connection that comes with multiport configuration connectivity port for PXIe and USB VNA or solder connector options provide switches configuration flexibility

Description

The U942xA/B/C FET solid state switches offer superior performance in terms of isolation and video leakage across a broad operating frequency range of up to 26.5/50/54 GHz. These SPDT/SP4T/SP8T switches are used to increase system flexibility and simplicity and are easily controlled with USB connection; that comes with the flexibility of multiport configuration connectivity port PXIe and USB VNA or through a soldering connector option. These switches offer unmatched isolation performance between ports, as high as 100 dB at 9 GHz or 70 dB up to 54 GHz (SPDT). In addition, the U942xA/B/C provide low video leakage less than 270 mVpp for SPDT which ensures safe testing of sensitive components. High video leakage can degrade measurement accuracy and possibly damage sensitive devices and components such as mixers and amplifiers. To learn more about video leakage and how it can affect measurements and devices, see Keysight's "Video Leakage Effects on Devices in Component Test Application Note." The switches fast switching speed in microseconds making it ideal for RF and microwave switching applications in instrumentation, communication, radar, switch matrices and various other test systems where speed and lifetime of a switch are critical parameters.



Specifications

Specifications describe the instrument's warranted performance. Supplemental and typical characteristics are intended to provide information useful in applying the instrument by giving typical, but not warranted performance parameters. U942xA/B/C specifications are tested at nominal voltage at 25 °C.

| Specifications | U9422A/B/C, SPDT | U9424A/B/C, SP4T | U9428A/B/C, SP8T |
|------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| Frequency range | 300 kHz to 26.5/50/54 GHz | 300 kHz to 26.5/50/54 GHz | 300 kHz to 26.5/50/54 GHz |
| Insertion loss (dB) | 300 kHz to 9 GHz: 3.1 9 to 18 GHz: 3.8 18 to 26.5 GHz: 4.6 26.5 to 37 GHz: 5.6 37 to 45 GHz: 5.9 45 to 52 GHz: 7.3 52 to 54 GHz: 8.1 | 300 kHz to 9 GHz: 4.0 9 to 14 GHz: 4.8 14 to 18 GHz: 5.3 18 to 26.5 GHz: 6.2 26.5 to 33 GHz: 7.0 33 to 38 GHz: 7.7 38 to 45 GHz: 9.3 45 to 50 GHz: 10.2 50 to 54 GHz: 10.8 | 300 kHz to 18 GHz: 6.0 18 to 28 GHz: 7.6 28 to 35 GHz: 8.3 35 to 42 GHz: 9.5 42 to 47 GHz: 11.5 47 to 54 GHz: 13.2 |
| Isolation (dB) | 300 kHz to 500 MHz: 90 500 MHz to 9 GHz: 100 9 to 18 GHz: 90 18 to 22 GHz: 88 22 to 30 GHz: 79.5 30 to 38 GHz: 80 38 to 50 GHz: 77 50 to 54 GHz: 70 | 300 kHz to 500 MHz: 89 500 MHz to 11 GHz: 96 11 to 26.5 GHz: 90 26.5 to 42 GHz: 78 42 to 46 GHz: 75 46 to 49 GHz: 70 49 to 54 GHz: 64 | 300 kHz to 500 MHz: 89 500 MHz to 5 GHz: 92 5 to 18 GHz: 65 18 to 32 GHz: 57 32 to 40 GHz: 52 40 to 54 GHz: 50 |
| OFF port return loss, dB (VSWR) | 300 kHz to 14 GHz: 13.3 (1.6) 14 to 20 GHz: 11.7 (1.7) 20 to 26.5 GHz: 12.9 (1.59) 26.5 to 40 GHz: 12.7 (1.6) 40 to 45 GHz: 7.8 (2.4) 45 to 51 GHz: 6.3 (2.9) 51 to 54 GHz: 9.5 (2.0) | 300 kHz to 8 GHz: 16.3 (1.4) 8 to 13 GHz: 12.5 (1.6) 13 to 35 GHz: 10.6 (1.8) 35 to 39 GHz: 12.8 (1.6) 39 to 43 GHz: 8.7 (2.2) 43 to 51 GHz: 5.1 (3.5) 51 to 54 GHz: 6.8 (2.7) | 300 kHz to 8 GHz: 17.5 (1.3) 8 to 15 GHz: 13.5 (1.5) 15 to 43 GHz: 10.0 (1.9) 43 to 54 GHz: 4.5 (3.9) |
| ON port return loss, dB (VSWR) | 300 kHz to 14 GHz: 14 (1.5) 14 to 20 GHz: 11 (1.79) 20 to 28 GHz: 9.5 (2.0) 28 to 45 GHz: 8.4 (2.2) 45 to 54 GHz: 6.2 (2.9) | 300 kHz to 9 GHz: 13 (1.5) 9 to 26.5 GHz: 8.5 (2.2) 26.5 to 37 GHz: 7.5 (2.5) 37 to 43 GHz: 5.8 (3.1) 43 to 51 GHz: 5.6 (3.2) 51 to 54 GHz: 7.6 (2.4) | 300 kHz to 6 GHz: 11.0 (1.8) 6 to 27 GHz: 7.5 (2.5) 27 to 40 GHz: 7.5 (2.5) 40 to 54 GHz: 5.0 (3.6) |
| Switching speed, typical | Solder terminal: 0.12 us Multiport configuration connectivity port: 16 us USB 3.0 300 us | Solder terminal: 4.5 us Multiport configuration connectivity port: 20 us USB 3.0: 300 us | Solder terminal: 6.75 us Multiport configuration connectivity port: 24 us USB 3.0: 300 us |
| Video leakage, typical | 270 mVpp | 270 mVpp | 50 mVpp |
| Power handling (max) | 25 dBm | 25 dBm | 26 dBm |
| Connector Type | 26.5 GHz: 3.5 mm, 50 GHz: 2.4 mm, 54 GHz: 1.85 mm | | |
| Connectivity | Solder terminal or USB 3.0 with Multiport configuration connectivity port for PXIe and USB VNA | | |
| Automation SW with VNA | Yes (for option 002) | | |



Note: Applies to all models and specifications: For the first, second and subsequent frequency band, the last frequency test point is \leq (inclusive) the frequency point.

Example for U9422A/B/C isolation: "300 kHz to 500 MHz" (inclusive) until the last point which is \leq 500 MHz with the specs of 90 dB. If it is \geq 500 MHz (example 500.0001 MHz), the specification refers to the next frequency range of "500 MHz to 9 GHz" with the specs of 100 dB

Switch Control and Biasing

U9422x Solder Wire (Option 001)

Power consumption: ~ 100 mA @ VCC = 5 V Use either 3.3 V or 5 V logic control

| CTRL logic | RF port |
|------------|---------|
| 0 | 1 |
| 1 | 2 |

U9424x Solder Wire (Option 001)

Power consumption: ~ 200 mA @ VCC = 5 V Use either 3.3 V or 5 V logic control

| CTRL1 logic | CTRL2 logic | RF port |
|-------------|-------------|---------|
| 0 | 0 | 1 |
| 1 | 0 | 2 |
| 0 | 1 | 3 |
| 1 | 1 | 4 |


U9428x Solder Wire (Option 001)

Power consumption: ~ 350 mA @ VCC = 5 VUse either 3.3 V or 5 V logic control

| U9428x, 5-pins connector to bare wire, | 85 mm (for SP8T option (| 01 only) |
|----------------------------------------|--------------------------|----------|
| | | |

| CTRL1 logic | CTRL2 logic | CTRL3 logic | RF port |
|-------------|-------------|-------------|---------|
| 0 | 0 | 0 | 1 |
| 1 | 0 | 0 | 2 |
| 0 | 1 | 0 | 3 |
| 1 | 1 | 0 | 4 |
| 0 | 0 | 1 | 5 |
| 1 | 0 | 1 | 6 |
| 0 | 1 | 1 | 7 |
| 1 | 1 | 1 | 8 |



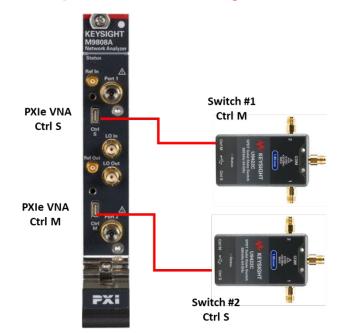

Multiport connectivity with PXIe & USB VNA (Option 002)

Figure 1. Example of connection using M980xA PXIe VNA to control 2 U9422x switches (Option 002) with multiport interconnect cable.

USB Connectivity (Option 002)


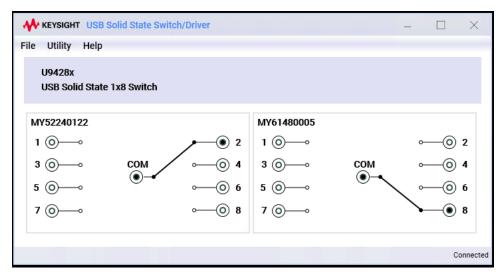


Figure 2. Example of soft front panel (SFP) when connected with U9428x switches. The USB connection allows control of the switches via SFP or through SCPI via Keysight IO control.



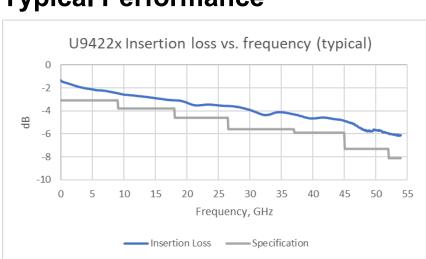

Typical Performance

Figure 3. U9422x insertion loss vs frequency (GHz) typical

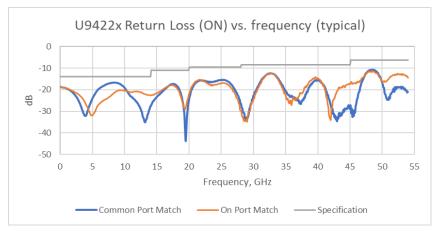


Figure 4. U9422x return loss (ON) vs frequency (GHz) typical

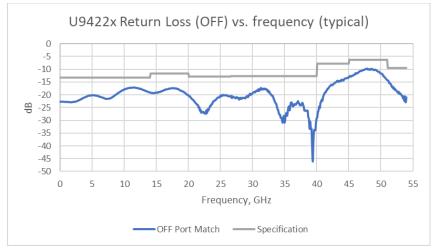


Figure 5. U9422x return loss (OFF) vs frequency (GHz) typical

KEYSIGHT

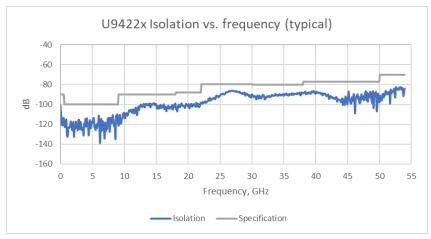


Figure 6. U9422x isolation vs frequency (GHz) typical

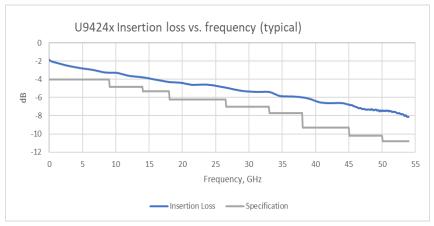


Figure 7. U9424x insertion loss vs frequency (GHz) typical

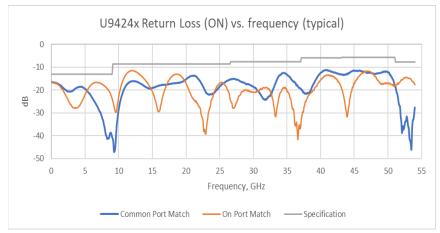


Figure 8. U9424x return loss (ON) vs frequency (GHz) typical



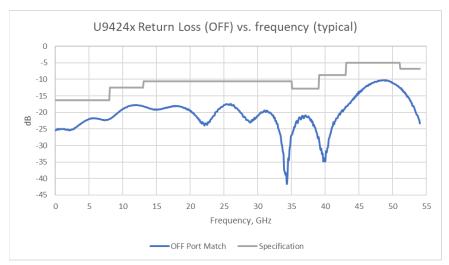


Figure 9. U9424x return loss (OFF) vs frequency (GHz) typical

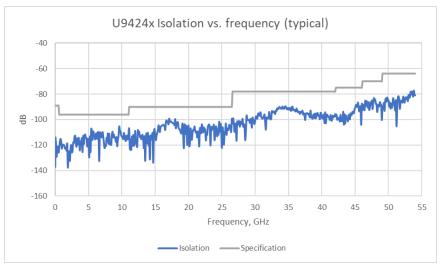


Figure 10. U9424x isolation vs frequency (GHz) typical

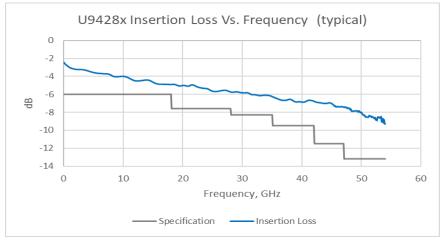


Figure 11. U9428x insertion loss vs frequency (GHz) typical

KEYSIGHT

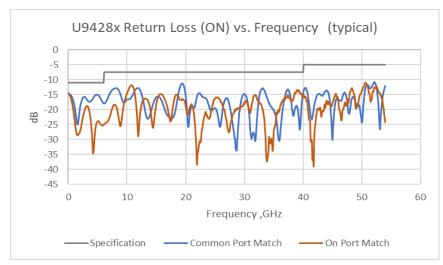


Figure 12. U9428x return loss (ON) vs frequency (GHz) typical

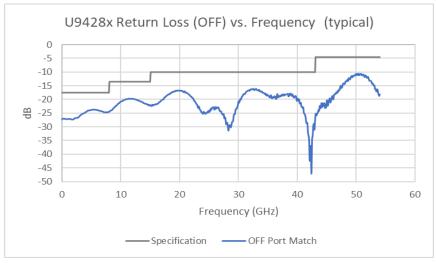


Figure 13. U9428x return loss (OFF) vs frequency (GHz) typical

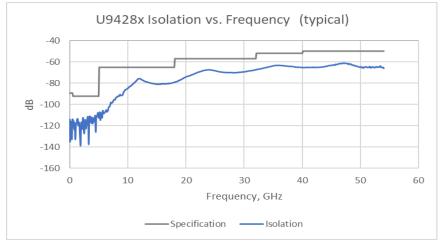


Figure 14. U9428x isolation vs frequency (GHz) typical


KEYSIGHT

Environmental Specifications

The U942xA/B/C FET solid state switches are designed to fully comply with Keysight Technologies' product operating environment specifications. The following summarizes the environmental specifications for these products.

| Environmental condition | U942xA/B/C |
|--------------------------|-----------------------------------------------|
| Temperature Operating | 0 °C to +55°C |
| Storage | – 40 °C to +70°C |
| Humidity | |
| Operating | 95% RH at 40°C (non-condensing) |
| Shock | |
| End-user handling | Delta-V: 1.6 m/s (60 in/s) ±5%, Duration <3ms |
| Transportation | 50G , Delta-V: 8m/s ±10% at 6 faces |
| Vibration | |
| Operating random | 0.21 Grms |
| Survival random | 2.41 Grms |
| Altitude | |
| Operating | <4,600 meters (15,000 feet) |
| Non-operating | <4,600 meters (15,000 feet) |
| ESD immunity | |
| Direct discharge | 4 kV per IEC 61000-4-2 |
| Air discharge | 8 kV per IEC 61000-4-2 |



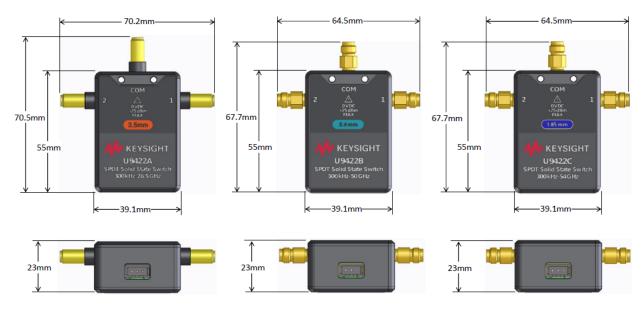

Mechanical Dimensions

Figure 15. U9422x dimension (option 001), SPDT

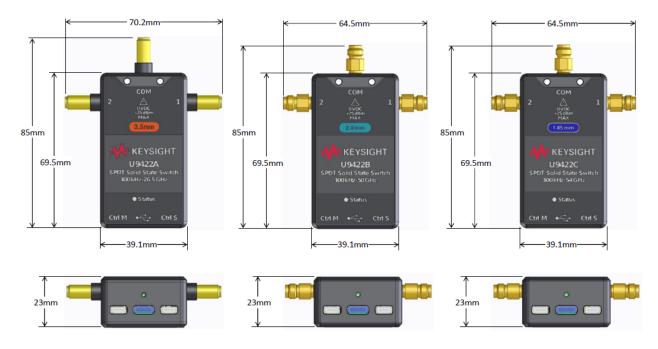


Figure 16. U9422x dimension (option 002), SPDT

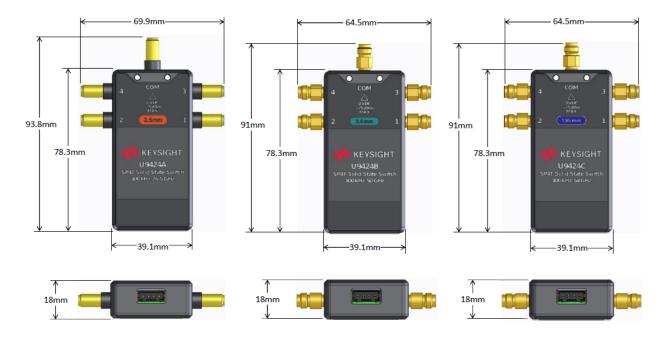


Figure 17. U9424x dimension (option 001), SP4T

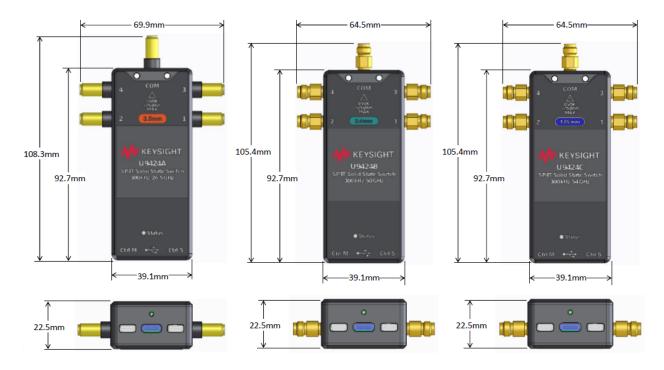


Figure 18. U9424x dimension (option 002), SP4T

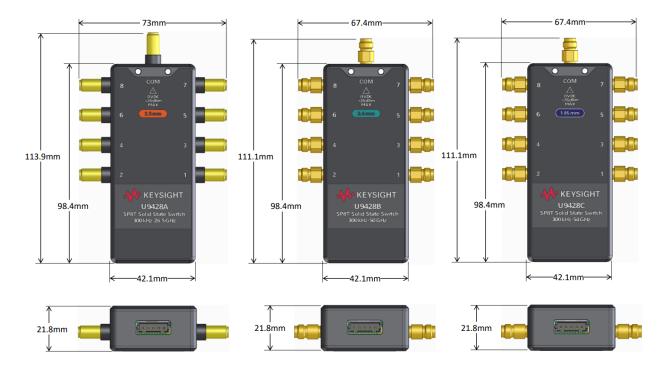


Figure 19. U9428x dimension (option 001), SP8T

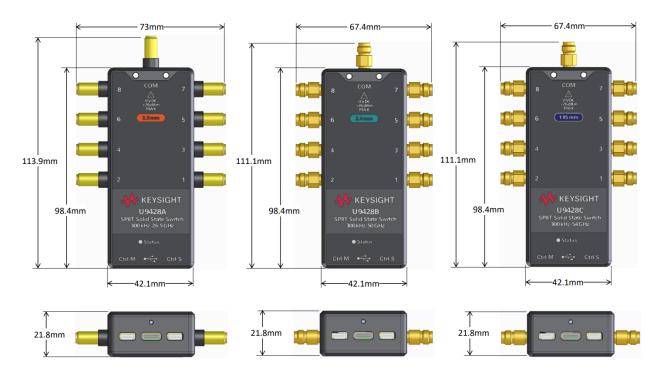


Figure 20. U9428x dimension (option 002), SP8T



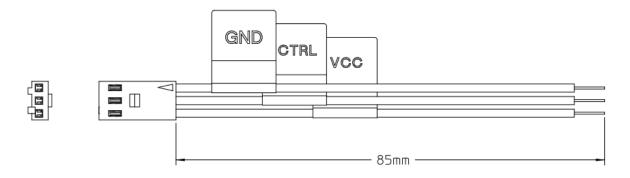


Figure 21. Option 101, 3-pins connector to bare wire, 85 mm (for SPDT option 001 only) dimension

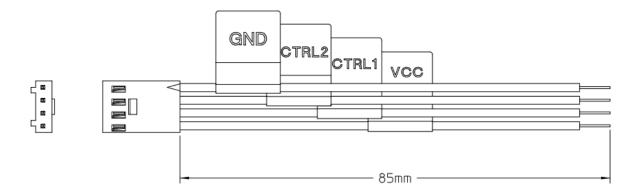


Figure 22. Option 101, 4-pins connector to bare wire, 85 mm (for SP4T option 001 only) dimension

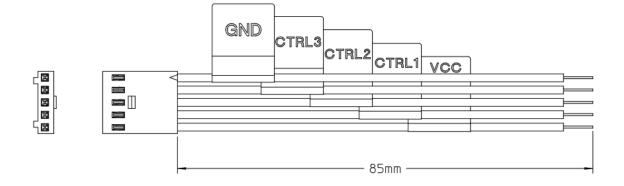


Figure 23. Option 101, 5-pins connector to bare wire, 85 mm (for SP8T option 001 only) dimension



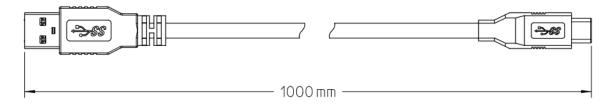


Figure 24. Option 201, USB 3.0 Type-A to Type-C, 1 meter (for option 002 only) dimension

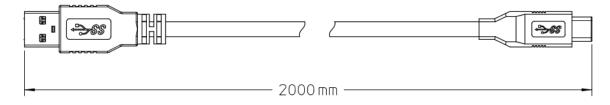


Figure 25. Option 202, USB 3.0 Type-A to Type-C, 2 meters (for option 002 only) dimension

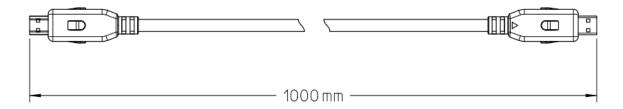


Figure 26. Option 301, interconnect cable for multiport configuration with PXIe & USB VNA (for option 002 only), 1 meter

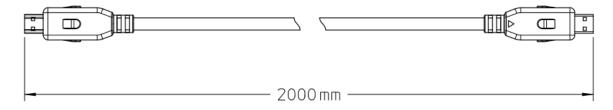


Figure 27. Option 302, interconnect cable for multiport configuration with PXIe & USB VNA (for option 002 only), 2 meters



Ordering Information

| Model | Description |
|------------------------|-----------------------------------------------------------------------------------------------------------------------|
| U9422A | FET Solid State Switch, 300 kHz to 26.5 GHz, SPDT |
| U9422B | FET Solid State Switch, 300 kHz to 50 GHz, SPDT |
| U9422C | FET Solid State Switch, 300 kHz to 54 GHz, SPDT |
| U9424A | FET Solid State Switch, 300 kHz to 26.5 GHz, SP4T |
| U9424B | FET Solid State Switch, 300 kHz to 50 GHz, SP4T |
| U9424C | FET Solid State Switch, 300 kHz to 54 GHz, SP4T |
| U9428A | FET Solid State Switch, 300 kHz to 26.5 GHz, SP8T |
| U9428B | FET Solid State Switch, 300 kHz to 50 GHz, SP8T |
| U9428C | FET Solid State Switch, 300 kHz to 54 GHz, SP8T |
| Connectivity Option | Option 001: Solder terminal, Option 002: USB and multiport configuration port |
| Cable option | Option 101: |
| | 3-pins connector to bare wire, 85 mm (for SPDT option 001 only) |
| | 4-pins connector to bare wire, 85 mm (for SP4T option 001 only) |
| | 5-pins connector to bare wire, 85 mm (for SP8T option 001 only) |
| | Option 201: USB 3.1 Type-A to Type-C, 1 meter (for option 002 only) |
| | Option 202: USB 3.1 Type-A to Type-C, 2 meters (for option 002 only) |
| | Option 301: interconnect cable for multiport configuration with PXIe & USB VNA (for option 002 only), 1 meter |
| | Option 302: interconnect cable for multiport configuration with PXIe & USB VNA (for option 002 only), 2 meters |

More RF and Microwave Test Accessories

For selection of more than 300 models of various type of RF and microwave test accessories with operating frequency up to 110 GHz. Go to: www.keysight.comd/find/mta

Keysight enables innovators to push the boundaries of engineering by quickly solving design, emulation, and test challenges to create the best product experiences. Start your innovation journey at www.keysight.com.



This information is subject to change without notice. © Keysight Technologies, 2021 – 2023, Published in USA, July 11, 2023, 3121-1500.EN